

## FDDC-6000-10000-50-20-S

### 6~10GHz, 50W

**Features:**

- \* Broadband
- \* Low Insertion Loss

**Applications:**

- \* Amplifiers
- \* Transmitter
- \* Laboratory Test
- \* Radar

**Electrical**

Frequency:	6~10GHz
Coupling:	20±0.5dB
VSWR (Mainline):	1.5 max.
Insertion Loss:	0.6dB max.
Directivity:	12dB min.
Power Handling:	50W CW

**Mechanical**

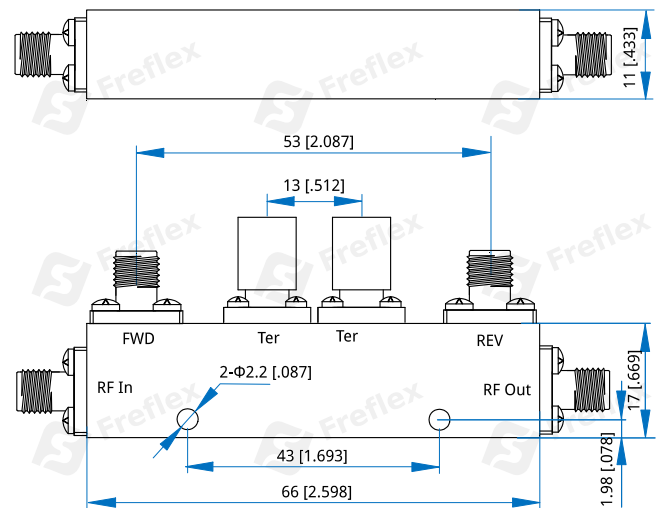
Size*1:	66*17*11mm 2.598*0.669*0.433in
Connectors:	SMA Female
Mounting:	2-Φ2.2mm through-hole

[1] Exclude connectors.

**How To Order**

**FDDC-6000-10000-50-20-S**

Customization is available upon request.

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]