

FDDC-900-930-3K-50-7S

0.9~0.93GHz, 3000W, 50dB

Features:

* Low Insertion Loss

Applications:

* Amplifiers
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	0.9~0.93GHz
Insertion Loss:	0.2dB max.
Coupling:	50±1dB
Directivity:	25dB min.
VSWR (Mainline):	1.2 max.
VSWR (Coupling):	1.4 max.
Average Power:	3000W CW

Mechanical

Size*1:	60*60*40mm 2.362*2.362*1.575in
RF Connectors:	7/16 DIN (L29) female
Coupling Connectors:	SMA female
Mounting:	4-M3mm depth 6mm

[1] Exclude connectors.

Environmental


Operating Temperature: -55~+85°C

How To Order

FDDC-900-930-3K-50-7S

Customization is available upon request.

Outline Drawings

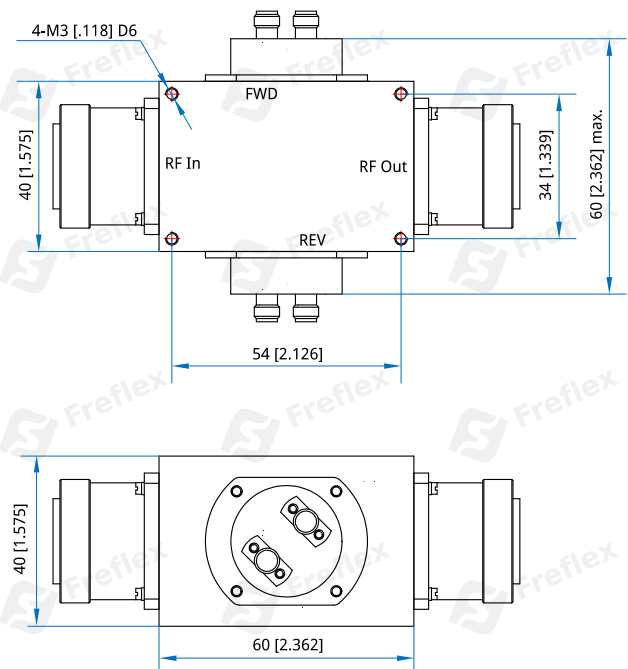

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]