

## FDPHA-17700-21200-15-K

17.7~21.2GHz, 15dB, 2.92mm

Features:  
\* Broadband

Applications:  
\* Wireless  
\* Transceiver  
\* Laboratory Test  
\* Broadcast


### Electrical

Frequency:	17.7~21.2GHz
Gain:	15dB min.
VSWR:	1.3 max.
Axial Ratio:	1dB max.
Polarization:	Left hand circular polarization Right hand circular polarization

### Mechanical

Connectors:	2.92mm Female
Material:	Copper
Finish:	Pickling passivation
Coating:	Black paint

### Outline Drawings

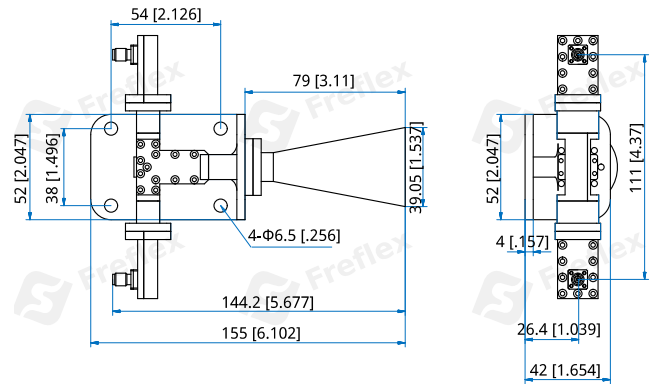

Unit: mm [in]

Tolerance:  $\pm 0.5\text{mm}$  [ $\pm 0.02\text{in}$ ]

### How To Order

**FDPHA-17700-21200-15-K**

Customization is available upon request.