

FDTC-4-NS-B2

4.3-10 Male, Non-Shorting

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Mechanical

Mating Connector:	4.3-10 female
Mating Life Cycle:	500 cycles
ROHS Compliant:	Full ROHS compliance
Outer Conductor:	Ternary alloy plated brass

Environmental


Temperature: -45~+125°C

How To Order

FDTC-4-NS-B2

Customization is available upon request.

Outline Drawings

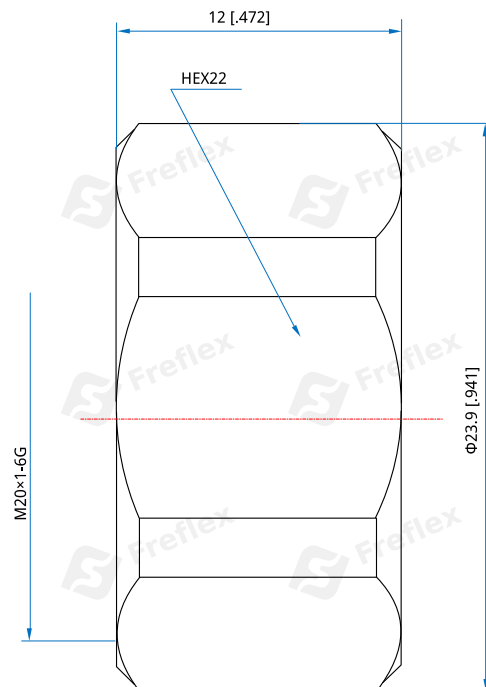

Unit: mm [in]

Tolerance: ± 0.2 mm [± 0.008 in]