

FE-1000-8000-S-15

1~8GHz, 15dB

Features:

- * Low VSWR
- * Small Size

Applications:

- * Amplifier
- * Laboratory Test
- * Instrumentation

Electrical

Frequency:	1~8GHz
Insertion Loss:	2dB max.
VSWR:	1.5 max.
Slope:	15dB typ. 17dB @1GHz 2dB @8GHz
Linearity:	±1.2dB max.
Power Handling:	25dBm typ.
Impedance:	50Ω

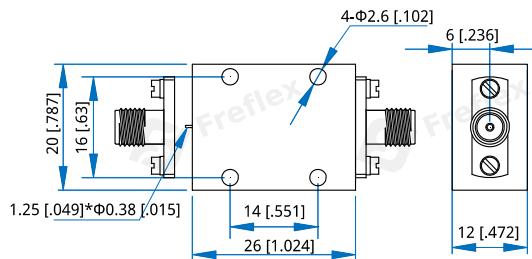
Mechanical

Size ^{*1} :	26*20*12mm 1.024*0.787*0.472in
Connectors:	SMA Female (Customizable)
Mounting:	4-Φ2.6mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+65°C
No-operating Temperature:	-65~+125°C max.

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FE-1000-8000-S-15

Customization is available upon request.