

FE-18000-26500-S-15

18~26.5GHz, 15dB

Features:

- * Low VSWR
- * Small Size

Applications:

- * Amplifier
- * Laboratory Test
- * Instrumentation

Electrical

| | |
|-----------------|--|
| Frequency: | 18~26.5GHz |
| Insertion Loss: | 3dB max. |
| VSWR: | 1.8 max. |
| Slope: | 15dB typ. 18dB @18GHz 3dB @26.5GHz |
| Linearity: | ±1.5dB max. |
| Power Handling: | 23dBm typ. |
| Impedance: | 50Ω |

Mechanical


| | |
|----------------------|-----------------------------------|
| Size ^{*1} : | 26*20*12mm 1.024*0.787*0.472in |
| Connectors: | SMA Female (Customizable) |
| Mounting: | 4-Φ2.6mm through-hole |

[1] Exclude connectors.

Environmental

| | |
|---------------------------|-----------------|
| Operating Temperature: | -40~+65°C |
| No-operating Temperature: | -65~+125°C max. |

Outline Drawings

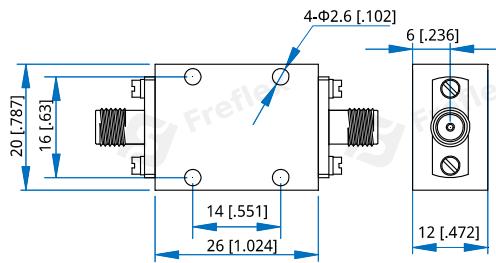

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

[FE-18000-26500-S-15](#)

Customization is available upon request.