

FE-26500-40000-S-15

26.5~40GHz, 15dB

Features:
 * Low VSWR
 * Small Size

Applications:
 * Amplifier
 * Laboratory Test
 * Instrumentation

Electrical

Frequency:	26.5~40GHz
Insertion Loss:	4dB max.
VSWR:	2 max.
Slope:	15dB typ. 19dB @26.5GHz 4dB @40GHz
Linearity:	±2dB max.
Power Handling:	23dBm typ.
Impedance:	50Ω

Mechanical


Size ^{*1} :	22*16.8*11mm 0.866*0.661*0.433in
Connectors:	SMA Female (Removable)
Mounting:	2-Φ2.2mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+65°C
No-operating Temperature:	-65~+125°C max.

Outline Drawings

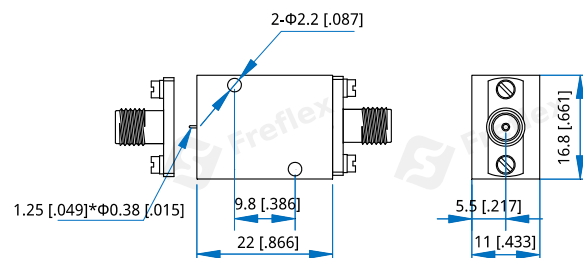

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FE-26500-40000-S-15

Customization is available upon request.