

FE-500-8000-S-5

0.5~8GHz, 5dB

Features:
 * Low VSWR
 * Small Size

Applications:
 * Amplifier
 * Laboratory Test
 * Instrumentation

Electrical

Frequency:	0.5~8GHz
Insertion Loss:	1.5dB max.
VSWR:	1.5 max.
Slope:	5dB
Attenuation:	6.5dB @1GHz 1.5dB @18GHz
Linearity:	±1dB
Impedance:	50Ω


Mechanical

Size ^{*1} :	26*20*12mm 1.024*0.787*0.472in
Connectors:	SMA Female
Mounting:	4-Φ2.6mm through-hole

[1] Exclude connectors.

Outline Drawings

(The above appearance is a universal appearance, and there may be slight differences in the appearance of this model.)

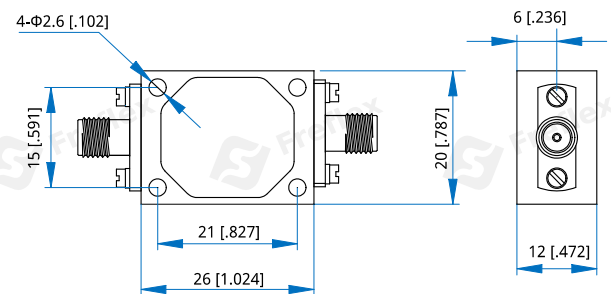

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FE-500-8000-S-5

Customization is available upon request.