

FE-6000-18000-S-3

6~18GHz, 3dB

Features:
 * Low VSWR
 * Small Size

Applications:
 * Amplifier
 * Laboratory Test
 * Instrumentation

Electrical


Frequency:	6~18GHz
Insertion Loss:	2dB max.
VSWR:	1.5 max.
Slope:	3dB
Attenuation:	2dB @6GHz 5dB @18GHz
Linearity:	±0.5dB
Impedance:	50Ω

Mechanical

Size ^{*1} :	30*20*12mm 1.181*0.787*0.472in
Connectors:	SMA Female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors.

Outline Drawings

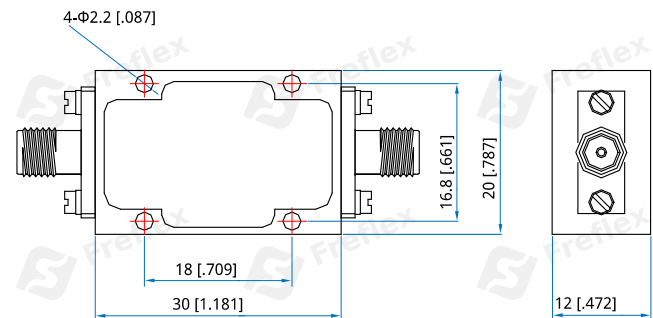

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FE-6000-18000-S-3

Customization is available upon request.