

FE-70-1000-S-15

0.07~1GHz, 15dB

Features:
 * Low VSWR
 * Small Size

Applications:
 * Amplifier
 * Laboratory Test
 * Instrumentation

Electrical

Frequency:	0.07~1GHz
Insertion Loss:	1.5dB max.
VSWR:	1.5 max.
Slope:	15dB
Attenuation:	1.5dB @70MHz 16.5dB @1GHz
Linearity:	±0.5dB max.
Power Handling:	+23dBm max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	30*20*8mm 1.181*0.787*0.315in
Connectors:	SMA Female (Removable)
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-55~+85°C
------------------------	-----------

Outline Drawings

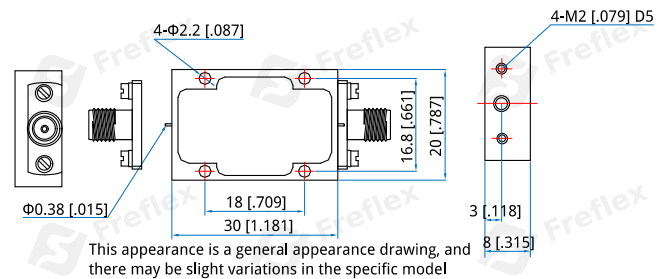

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FE-70-1000-S-15

Customization is available upon request.