

FE-7500-18000-S-25

7.5~18GHz, 25dB

Features:
 * Low VSWR
 * Small Size

Applications:
 * Amplifier
 * Laboratory Test
 * Instrumentation

Electrical

Frequency:	7.5~18GHz
Insertion Loss:	8.5±1dB @7.5GHz
	1.2±1dB @18GHz
VSWR:	2 max.
Slope:	25dB

Mechanical


Size ^{*1} :	20*16.8*10mm
	0.787*0.661*0.394in
Connectors:	SMA Female
Mounting:	4-Φ2.5mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	-40~+75°C
--------------	-----------

Outline Drawings

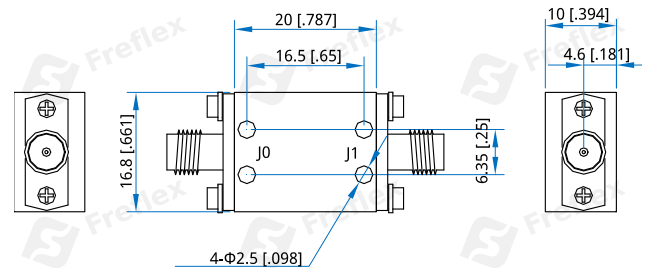

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FE-7500-18000-S-25

Customization is available upon request.