

FE-7500-18000-S-8

7.5~18GHz, 8dB

Features:
 * Low VSWR
 * Small Size

Applications:
 * Amplifier
 * Laboratory Test
 * Instrumentation

Electrical

Frequency:	7.5~18GHz
Insertion Loss:	2.5dB max.
VSWR:	1.6 max.
Slope:	8dB
Attenuation:	10.5dB @1GHz 2.5dB @18GHz
Linearity:	±1.5dB
Impedance:	50Ω


Mechanical

Size ^{*1} :	30*20*10mm 1.181*0.787*0.394in
Connectors:	SMA Female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors.

Outline Drawings

(The above appearance is a universal appearance, and there may be slight differences in the appearance of this model.)

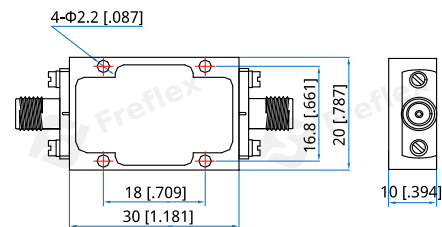

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FE-7500-18000-S-8

Customization is available upon request.