

FE-8500-9200-S-2

8.5~9.2GHz, 2dB

Features:
 * Low VSWR
 * Small Size

Applications:
 * Amplifier
 * Laboratory Test
 * Instrumentation

Electrical

Frequency:	8.5~9.2GHz
Insertion Loss:	0.8dB max.
VSWR:	1.5 max.
Slope:	2dB
Attenuation:	2.8dB @8.5GHz 0.8dB @9.2GHz
Linearity:	±0.5dB
Power Handling:	24dBm max.

Mechanical

Size ^{*1} :	30*20*12mm 1.181*0.787*0.472in
Connectors:	SMA Female (50Ω)
Mounting:	4-Φ2.2mm through-hole


[1] Exclude connectors.

Environmental

Operating Temperature:	-45~+75°C
------------------------	-----------

Outline Drawings

(The above appearance is universal, and there may be slight variations in the appearance of this model.)

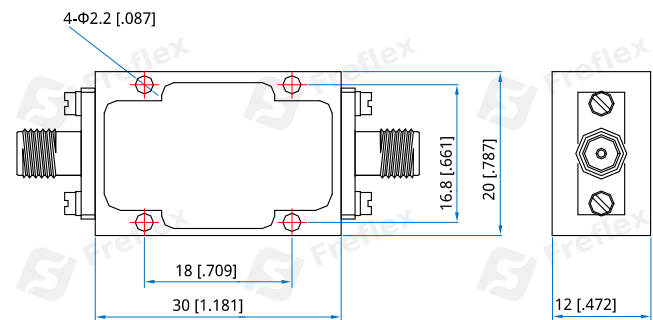

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FE-8500-9200-S-2

Customization is available upon request.