

FFA2650

DC~26.5GHz, 50W

Features:
 * Low VSWR
 * High Attenuation Flatness

Applications:
 * Wireless
 * Transmitter
 * Laboratory Test
 * Radar

Electrical

Frequency: DC~26.5GHz
 Attenuation: 1~60dB
 Impedance: 50Ω
 Average Power*1: 50W@25°C max.

[1] Derated linearly to 5W@125°C.

Mechanical

RF Connectors: SMA, 3.5mm
 Housing: Aluminum
 Outer Conductor: Passivated stainless steel or gold plated brass
 Male Inner Conductor: Gold plated brass
 Female Inner Conductor: Gold plated beryllium copper


Environmental

Temperature: -55~+85°C

Peak Power

Peak Power (W)	Pulse Width (μs)	Duty Cycle (%)	Applicable Scope
200	5	10	@SMA 10, 20, 30, 40dB
500		10	@3.5mm 10, 20, 30, 40dB
1000	5	5	@SMA 50, 60dB
		5	@SMA 1~9dB
1000	5	2.5	@3.5mm 3, 6, 50, 60dB
		2.5	@SMA 1~9dB

Outline Drawings

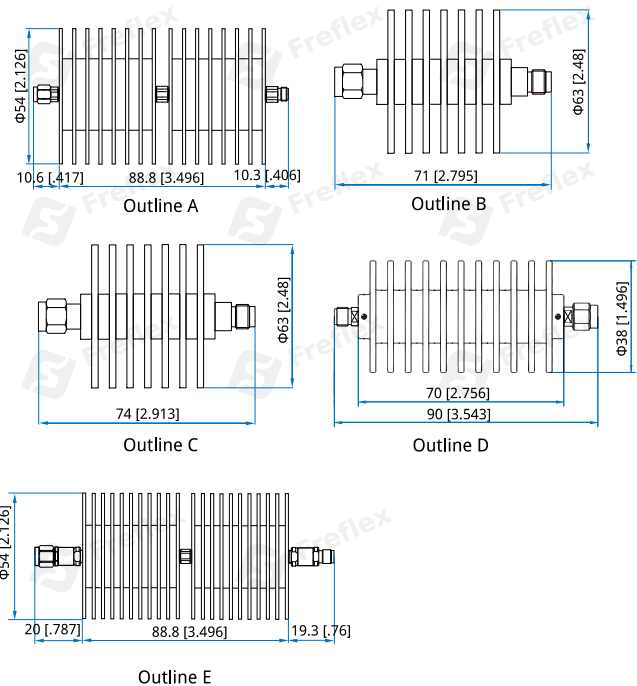

Unit: mm [in]
 Tolerance: ±2mm [±0.08in]

Attenuation Accuracy and VSWR (SMA)

Frequency (GHz)	Attenuation Accuracy (±dB) vs. Attenuation (dB)						VSWR (max.)	
	1~9	10	20	30	40	50		60
DC~26.5	-1.0/+2.5	-2.0/+2.0	-2.0/+2.0	-2.0/+2.0	-2.0/+2.0	±1.0	±1.0	1.3

Attenuation Accuracy and VSWR (3.5mm)

Frequency (GHz)	Attenuation Accuracy (±dB) vs. Attenuation (dB)								VSWR (max.)
	3	6	10	20	30	40	50	60	
DC~12.4	-0.8/+0.3	±1.0	-	-	-	-	-1.0/+0.75	-1.0/+0.5	1.20
DC~18	±0.8	±1.0	-	-	-	-	±1.0	-1.0/+0.75	1.25
DC~26.5	-0.8/+1.0	-1.0/+1.7	-2.0/+2.0	-2.0/+2.0	-2.0/+2.0	-2.0/+2.0	±1.0	±1.0	1.30, 1.35@10~40dB

How To Order**FFA2650-X-Y-Z**

X: Frequency in GHz

Y: Attenuation in dB

Z: Connector type

Connector naming rules:

S -SMA (Outline D - 1~9dB, Outline A - 10~40dB, Outline B - 50~60dB)

3 - 3.5mm (Outline C - 3, 6, 50, 60dB, Outline E - 5 - 10~40dB)

Examples:

To order an attenuator, DC~26.5GHz, SMA male to SMA female, 20dB attenuation, specify FFA2650-26.5-20-S.