

FFA40K1

DC~40GHz, 100W

Features:

- * Low VSWR
- * High Attenuation Flatness

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	DC~40GHz
Attenuation:	10, 20, 30, 40dB
Impedance:	50Ω
Average Power*1:	100W@25°C max.
Peak Power:	1KW (5μS pulse width, 10% duty cycle)

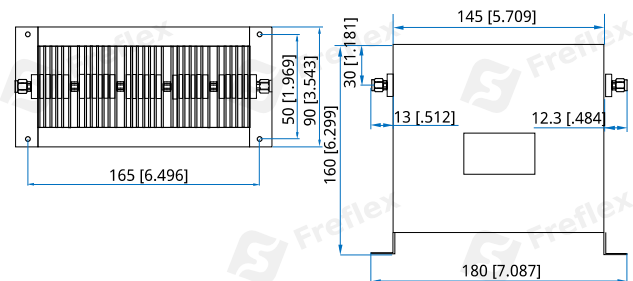
[1] Derated linearly to 10W@125°C.

Mechanical

RF Connectors:	2.92mm
Connector Housing:	Passivated stainless steel
Heat Sinks Housing:	Aluminum black anodize
Dielectric:	PEI
Male Inner Conductor:	Gold plated brass
Female Inner Conductor:	Gold plated beryllium copper

Environmental

Temperature: -55~+125°C

Outline Drawings


Unit: mm [in]

Tolerance: ±2mm [±0.08in]

Attenuation Accuracy and VSWR

Frequency (GHz)	Attenuation Accuracy (±dB) vs. Attenuation (dB)				VSWR (max.)
	10	20	30	40	
DC~40	-4.0/+4.0	-4.0/+4.0	-4.0/+4.0	-4.0/+4.0	1.40

How To Order

FFA40K1-X-Y-Z

X: Frequency in GHz

Y: Attenuation in dB

Z: Connector type

Connector naming rules:

K - 2.92mm

Examples:

To order an attenuator, DC~40GHz, 2.92mm male to 2.92mm female, 20dB attenuation, specify FFA40K1-40-20-K.