

## FFM4-9600-11200

X4, 9.6~11.2GHz

**Features:**

- \* Broadband
- \* Low Power Consumption

**Applications:**

- \* Wireless
- \* Transmitter
- \* Laboratory Test

### Electrical

|                        |             |
|------------------------|-------------|
| Output Frequency:      | 9.6~11.2GHz |
| Input Frequency:       | 2.4~2.8GHz  |
| Multiplication Factor: | 4           |
| Output Power:          | 12dBm min.  |
| Input Power:           | 0~5dBm      |
| Voltage:               | +5±0.5V     |
| Current:               | 150mA max.  |

### Mechanical

Size\*1: 25\*30\*8mm  
0.984\*1.181\*0.315in


RF Connector: SMA female

[1] Exclude connectors.

### Environmental

Operating Temperature: -40~+85°C

### Outline Drawings

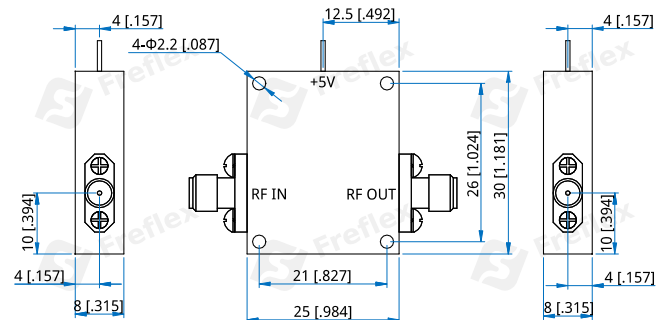

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

### How To Order

**FFM4-9600-11200**

Customization is available upon request.