

FHF-1000-3000-25

1~3GHz, 25dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	1~3GHz
Insertion Loss:	2.5dB max.
VSWR:	1.8 max.
Stopband Attenuation:	25dB @DC~0.95GHz min.
Impedance:	50Ω
Average Power:	7W

Mechanical


Size ^{*1} :	35*12*8mm 1.378*0.472*0.315in
Connectors:	SMA Female
Mounting:	4-M2 depth 5mm

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

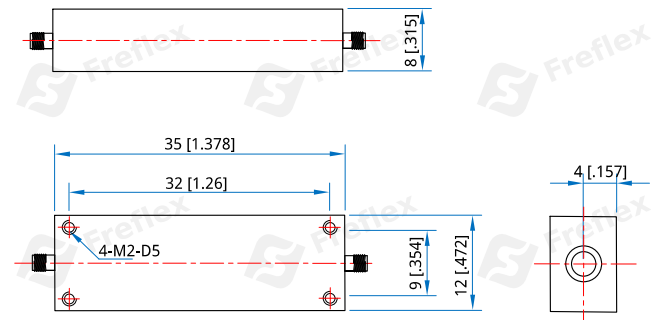

Unit: mm [in]

Tolerance: ±0.1mm [±0.004in]

How To Order

FHF-1000-3000-25

Customization is available upon request.