

FHF-1250-7000-60

1.25~7GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	1.25~7GHz
Insertion Loss:	2dB max. @1.25~1.4GHz 1dB max. @1.4~7GHz
VSWR:	1.5 max.
Stopband Attenuation:	60dB min. @DC~1.04GHz
Impedance:	50Ω
Average Power:	15W max.

Mechanical


Size ^{*1} :	86*36*10mm 3.386*1.417*0.394in
Weight:	85g
Connectors:	SMA female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	-55~+85°C
--------------	-----------

Outline Drawings

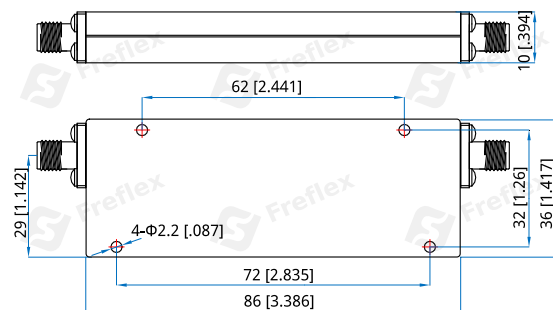

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

FHF-1250-7000-60

Customization is available upon request.