

FHF-2000-10000-50

2~10GHz, 50dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	2~10GHz
Insertion Loss:	1dB max.
VSWR:	1.5 max.
Stopband Attenuation:	50dB @DC~1.6GHz min.
Impedance:	50Ω
Average Power:	15W max.

Mechanical


Size ^{*1} :	32*20.5*10mm 1.26*0.807*0.394in
Connectors:	SMA Female
Mounting:	4-Φ2.2mm through-hole
Coating:	Black paint

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+85°C
------------------------	-----------

Outline Drawings

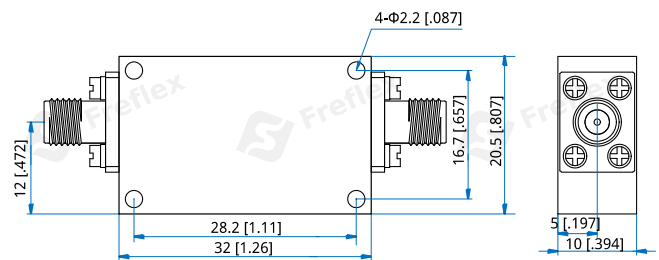

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FHF-2000-10000-50

Customization is available upon request.