

FHF-3000-18000-60

3~18GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	3~18GHz
Insertion Loss:	1.6dB max. @3~3.2GHz 1dB max. @3.2~18GHz
VSWR:	1.5 max.
Stopband Attenuation:	60dB @DC~2.6GHz
Average Power:	15W max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	44*29*10mm 1.732*1.142*0.394in
Connectors:	SMA Female
Mounting:	4-Φ2.2mm through-hole
Weight:	40g

[1] Exclude connectors.

Environmental

Temperature:	-55~+85°C
--------------	-----------

Outline Drawings

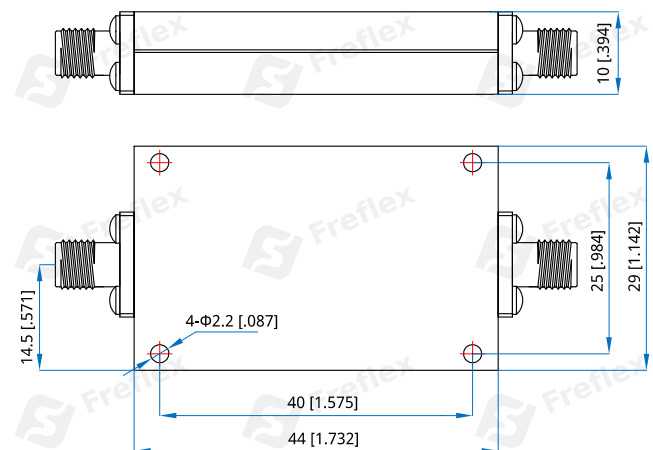

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FHF-3000-18000-60

Customization is available upon request.