

FHF-30000-50000-35
30~50GHz, 35dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	30~50GHz
Insertion Loss:	3dB max.
VSWR:	2 max.
Stopband Attenuation:	35dB min. @DC~28GHz
Impedance:	50Ω
Average Power:	1W max.

Mechanical


Size*1:	13.2*15*12.7mm 0.52*0.591*0.5in
Connectors:	2.4mm Female
Mounting:	2-Φ2.2mm through-hole
Coating:	Black paint
Weight:	20g typ.

[1] Exclude connectors.

Environmental

Operating Temperature: -40~+85℃

Outline Drawings

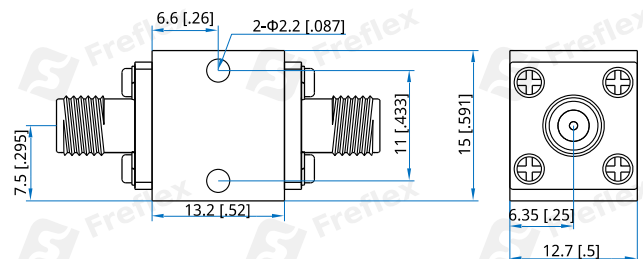

Unit: mm [in]

Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]

How To Order

FHF-30000-50000-35

Customization is available upon request.