

FHF-3500-19000-60

3.5~19GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	3.5~19GHz
Insertion Loss:	2dB max. @3.5~3.7GHz 1dB max. @3.7~19GHz
VSWR:	1.5 max.
Stopband Attenuation:	60dB min. @DC~3.08GHz
Impedance:	50Ω
Average Power:	15W max.

Mechanical


Size ^{*1} :	41*29*10mm 1.614*1.142*0.394in
Weight:	36g
Connectors:	SMA female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	-55~+85°C
--------------	-----------

Outline Drawings

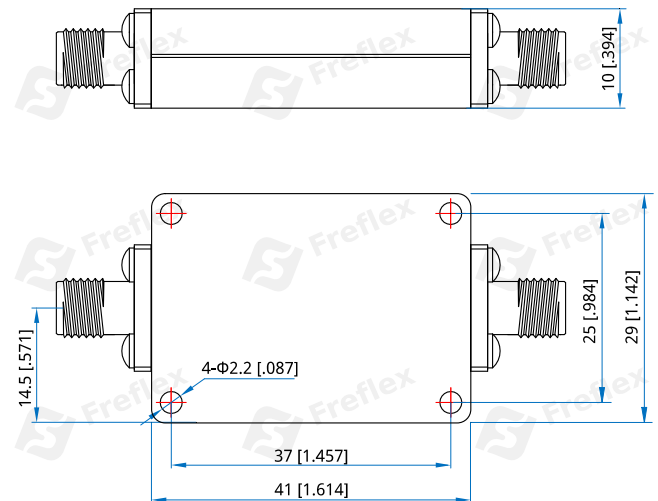

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

FHF-3500-19000-60

Customization is available upon request.