

FHF-5000-18000-50

5~18GHz, 50dB

Features:
 * High Stopband Rejection
 * Small Size

Applications:
 * Telecom
 * Laboratory Test
 * Receivers
 * Instrumentation

Electrical

Passband: 5~18GHz
 Insertion Loss: 1dB max.
 VSWR: 2 max.
 Stopband Attenuation: 50dB @DC~4.2GHz min.
 Impedance: 50Ω
 Average Power: 10W max.

Mechanical


Size^{*1}: 26*25*10mm
 1.024*0.984*0.394in
 Connectors: SMA Female
 Mounting: 4-Φ2.2mm through-hole
 Coating: Black paint
 Weight: 25g

[1] Exclude connectors.

Environmental

Operating Temperature: -45~+85°C

Outline Drawings

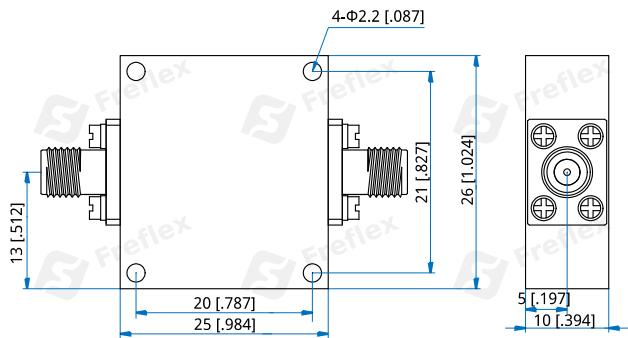

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FHF-5000-18000-50

Customization is available upon request.