

FHF-6000-24000-60

6~24GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	6~24GHz
Insertion Loss:	2dB max. @6~6.3GHz 1dB max. @6.3~24GHz
VSWR:	1.5 max.
Stopband Attenuation:	60dB @DC~5.4GHz min.
Impedance:	50Ω
Average Power:	15W max.

Mechanical


Size ^{*1} :	32*23*10mm 1.26*0.906*0.394in
Weight:	25g
Connectors:	SMA Female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	-55~+85°C
--------------	-----------

Outline Drawings

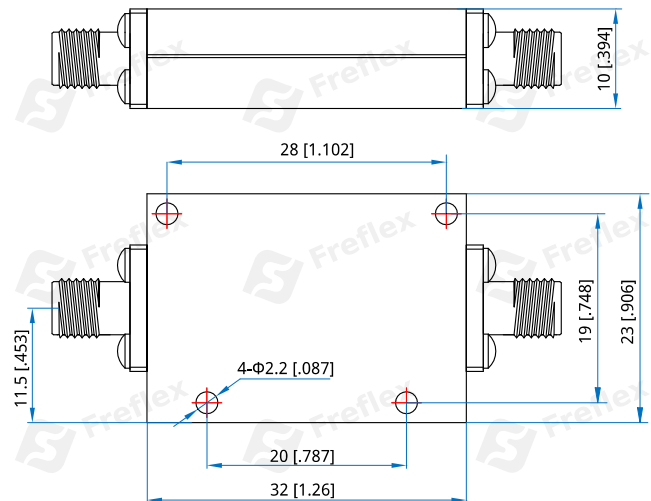

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FHF-6000-24000-60

Customization is available upon request.