

FWT19-1K

WR-19, 1000W

Features:

- * Low VSWR
- * Broadband

Applications:

- * Transmitters
- * Antennas
- * Laboratory Test
- * Impedance Matching

Electrical

Frequency:	39.2~59.6GHz
Average Power:	1000W
VSWR:	1.2 max.

Mechanical

Interface:	WR-19 (BJ500)
Flange:	FUGP500
Material:	Aluminium
Finish:	Conductive oxidation
Coating:	Gray paint

How To Order

FWT19-1K-Y-Z

Y : Material

Z : Flange type

Material naming rules:

A - Aluminum (Outline A)

Flange naming rules:


10 - FUGP500 (Outline A)

Examples:

To order a high power waveguide termination, WR-19, 1KW, Aluminum, FUGP500, specify FWT19-1K-A-10.

Customization is available upon request.

Outline Drawings

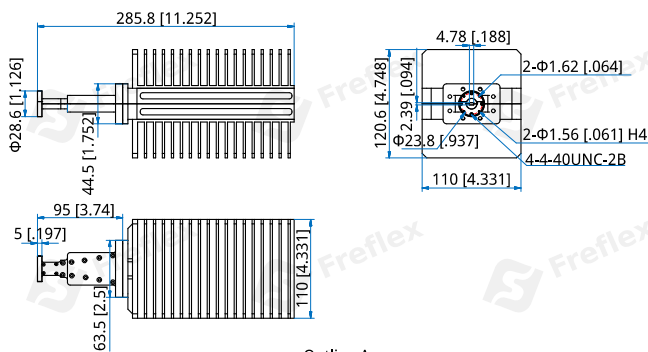

Outline A

Unit: mm [in]

Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]