

FWT28-1K

WR-28, 1000W

Features:
 * Low VSWR
 * Broadband

Applications:
 * Transmitters
 * Antennas
 * Laboratory Test
 * Impedance Matching

Electrical


Frequency: 26.3~40GHz
 Average Power: 1000W max.
 VSWR: 1.2 max.

Mechanical

Interface: WR-28(BJ320)
 Flange: FBP320

Customization is available upon request.

Outline Drawings

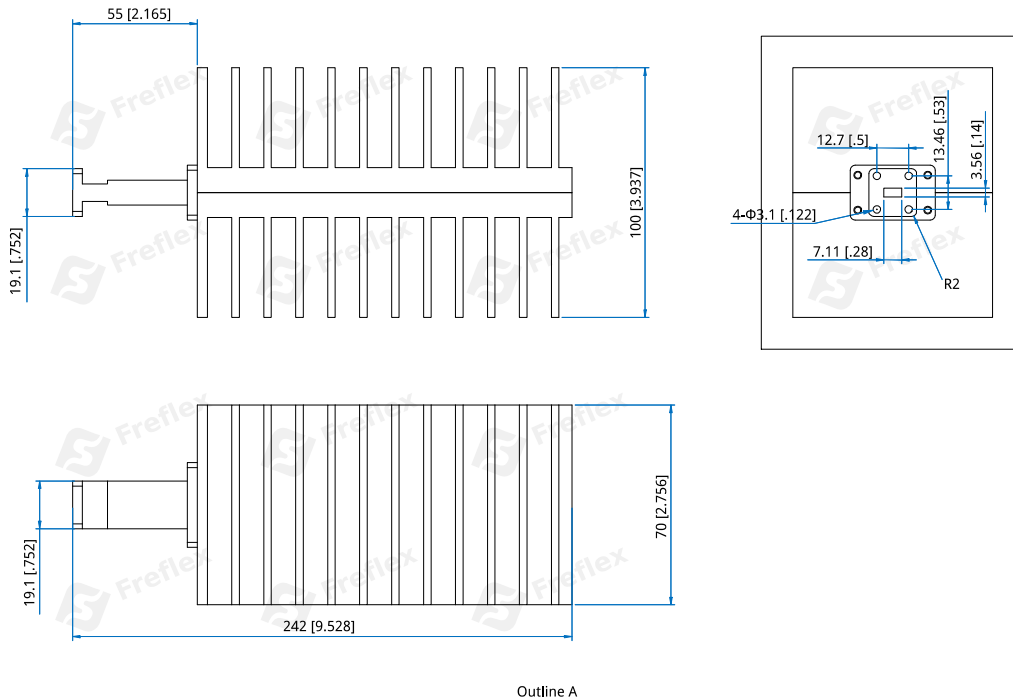

Unit: mm [in]
 Tolerance: ±0.5mm [±0.02in]

How To Order

FWT28-1K-Y-Z

Y : Material

Z : Flange type

Material naming rules:
 A - Aluminum (Outline A)

Flange naming rules:
 1 - FBP320 (Outline A)

Examples:
 To order a high power waveguide termination, WR-28, 1KW, Aluminum, FBP320, specify FWT28-1K-A-1.

Customization is available upon request.