

## FWT284-2K5

### WR-284, 2.5KW

Features:  
\* Low VSWR

Applications:  
\* Transmitters  
\* Antennas  
\* Laboratory Test  
\* Impedance Matching

#### Electrical

Frequency: 2.6~3.95GHz  
Average Power: 2.5KW  
VSWR: 1.2 max.


#### Mechanical

Waveguide Size: WR-284 (BJ32)  
Flange: FDP32

#### Environmental

Temperature: -55~+125°C

#### Outline Drawings

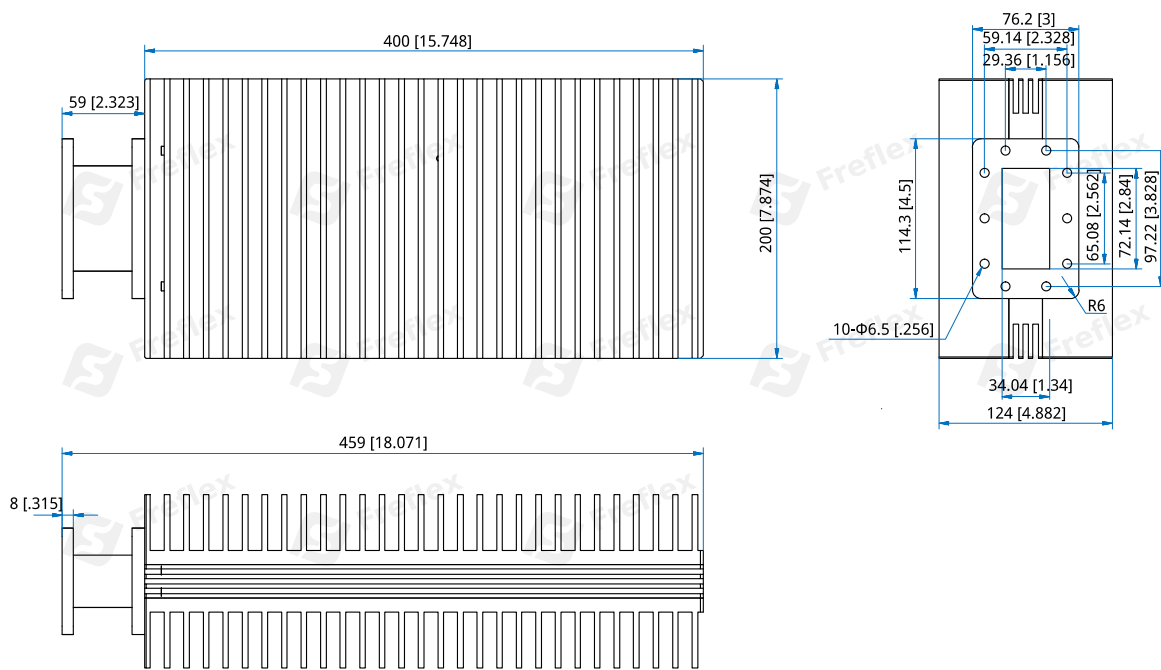

Outline A

Unit: mm [in]  
Tolerance: ±0.5mm [±0.02in]

#### How To Order

**FWT284-2K5-Y-Z**

Y : Material

Z : Flange type

Material naming rules:  
A - Aluminum (Outline A)

Flange naming rules:

2 - FDP32 (Outline A)

Examples:

To order a high power waveguide termination, WR-284, 2.5KW, Aluminum, FDP32, specify FWT284-2K5-A-2.

Customization is available upon request.