

FWT284-5K

WR-284, 5KW

Features:
* Low VSWR

Applications:
* Transmitters
* Antennas
* Laboratory Test
* Impedance Matching




Electrical

Frequency: 2.7~3.1GHz
Average Power: 5KW
VSWR: 1.2 max.

Mechanical

Waveguide Size: WR-284 (BJ32)
Flange: FDP32
Material: Aluminium
Finish: Conductive oxidation
Coating: Black paint

Outline Drawings

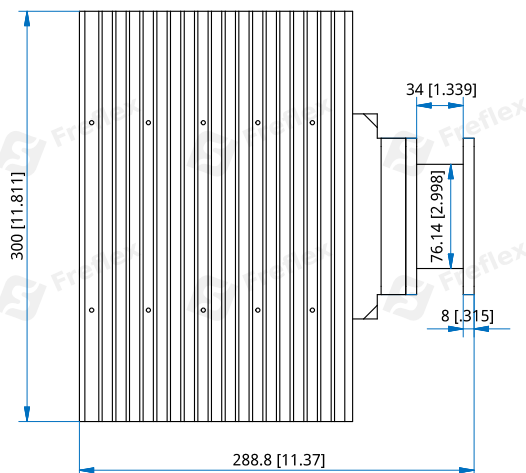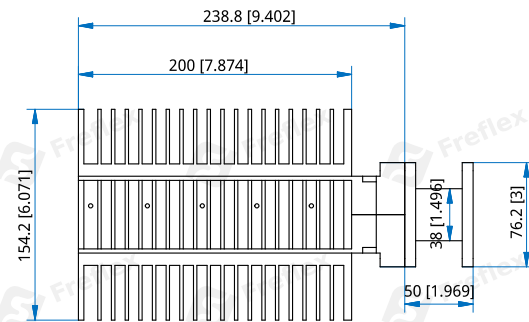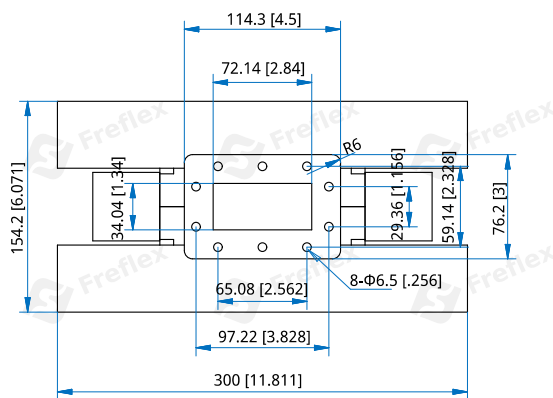

Outline A

Unit: mm [in]
Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]

How To Order

FWT284-5K-Y-Z

Y: Material

Z: Flange type

Material naming rules:

A - Aluminum (Outline A)

Flange naming rules:

2 - FDP32 (Outline A)

Examples:

To order a high power waveguide termination, WR-284, 5KW, Aluminum, FDP32, specify FWT284-5K-A-2.

Customization is available upon request.