

## FWT340-20K

### WR-340, 20KW

Features:  
\* Low VSWR

Applications:  
\* Transmitters  
\* Antennas  
\* Laboratory Test  
\* Impedance Matching


#### Electrical

Frequency: 2.17~3.3GHz  
Average Power: 20KW  
VSWR: 1.25 max.

#### Mechanical

Waveguide Size: WR-340 (BJ26)  
Flange: FDP26  
Material: Aluminium  
Finish: Conductive oxidation  
Coating: Sea gray  
Cooling: Water cooling

#### Outline Drawings

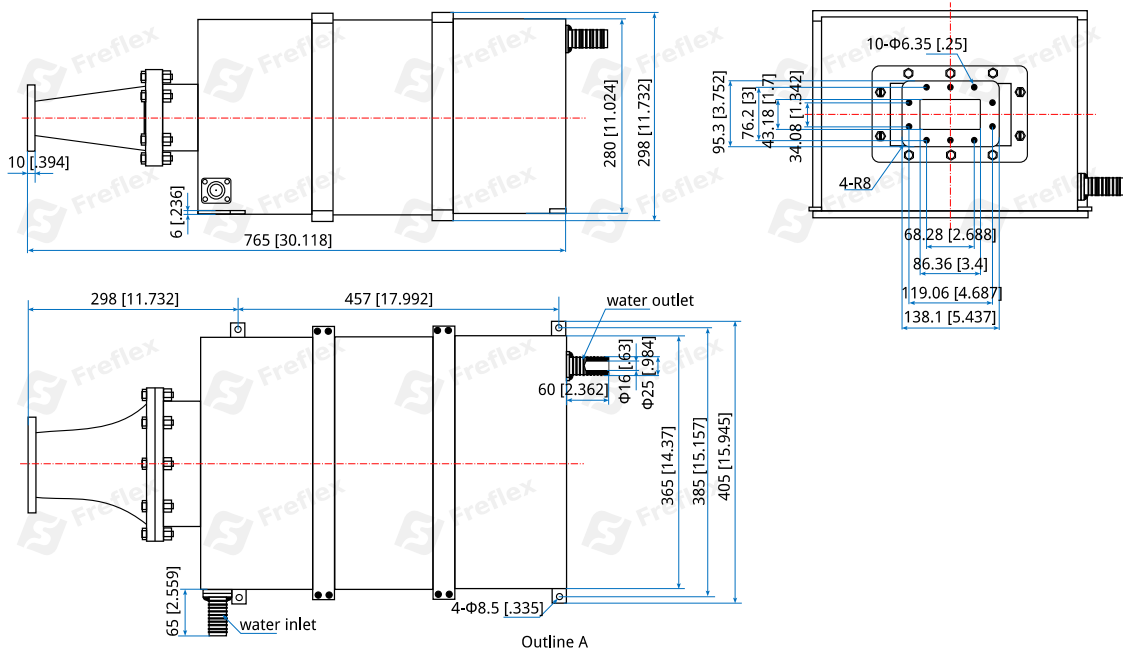

Unit: mm [in]

Tolerance: ±5mm [±0.197in]

#### How To Order

**FWT340-20K-Y-Z**

Y: Material

Z: Flange type

Material naming rules:

A - Aluminum (Outline A)

Flange naming rules:

2 - FDP26 (Outline A)

Examples:

To order a high power waveguide termination, WR-340, 20KW, Aluminum, FDP26, specify FWT340-20K-A-2.

Customization is available upon request.