

# FL-30-10

## 0.03GHz, 10dBm

Features:  
\* Broadband

Applications:  
\* Wireless  
\* Transmitter  
\* Laboratory Test  
\* Radar

### Electrical

Frequency:	0.03GHz
Insertion Loss:	1.2dB
Flat Leakage:	10dBm typ.
VSWR:	1.5
Average Power:	10W max.
Impedance:	50Ω

### Mechanical


Size <sup>*1</sup> :	20*13*13mm 0.787*0.512*0.512in
RF Connectors:	SMA Female
Mounting:	2-Φ2.2mm through-hole

[1] Exclude connectors.

### Environmental

Operating Temperature:	-45~+75°C
------------------------	-----------

### Outline Drawings

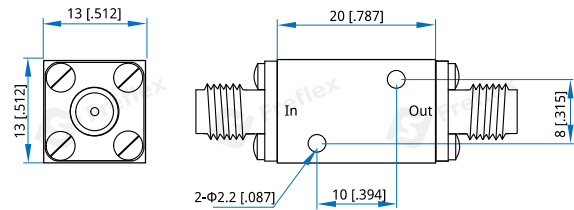

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

### How To Order

**FL-30-10**

Customization is available upon request.