

FL-300-6000-10

0.3~6GHz, 10dBm

Features:
* Broadband

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	0.3~6GHz
Insertion Loss:	1.2dB max.
Flat Leakage:	10dBm max.
VSWR:	1.5 max.
Average Power:	10W
Impedance:	50Ω

Mechanical


Size ^{*1} :	20*13*13mm 0.787*0.512*0.512in
RF Connectors:	SMA Female
Mounting:	2-Φ2.2mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-45~+75°C
------------------------	-----------

Outline Drawings

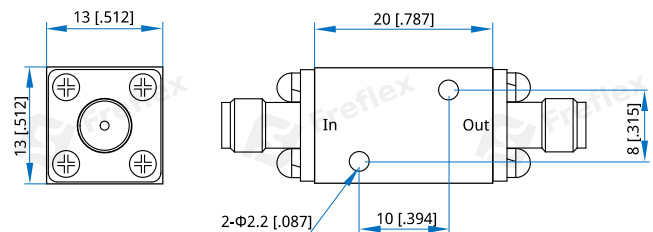

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FL-300-6000-10

Customization is available upon request.