

FL-500-1000-16

0.5~1GHz, 16dBm

Features:
* Broadband

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	0.5~1GHz
Insertion Loss:	0.4dB max.
Flat Leakage:	+16dBm typ.
VSWR:	1.4 typ.
Input Power(CW):	1W
Impedance:	50Ω

Mechanical


Size ^{*1} :	Φ11*20mm Φ0.433*0.787in
RF Connectors:	SMA

[1] Exclude connectors.

Environmental

Operating Temperature:	-45~+85°C
Non-operating Temperature:	-55~+125°C

Outline Drawings

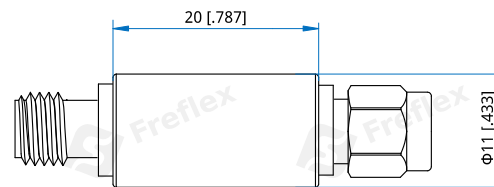

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FL-500-1000-16

Customization is available upon request.