

FLA-200-6000-42-13

0.2~6GHz, 42dB, 1.3dB

Features:
 * Broad Band
 * Low Noise

Applications:
 * Wireless
 * Receiver
 * Laboratory Test
 * Radar

Electrical

Frequency:	0.2~6GHz
Gain:	42dB min.
Gain Flatness:	±2.0dB typ.
Output Power (P1dB):	+15dBm min.
Noise Figure:	1.3 typ.
Spurious:	-60dBc max.
Input VSWR:	1.5 typ.
Output VSWR:	2 typ.
Voltage:	+12V DC
Current:	200mA typ.
Impedance:	50Ω
Input Power Without Damage:	+15dBm max.

Mechanical


Size ^{*1} :	50*30*15mm 1.969*1.181*0.591in
Weight:	200g max.
RF Connectors:	SMA Female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-20~+60°C
Non-operating Temperature:	-45~+85°C

Outline Drawings

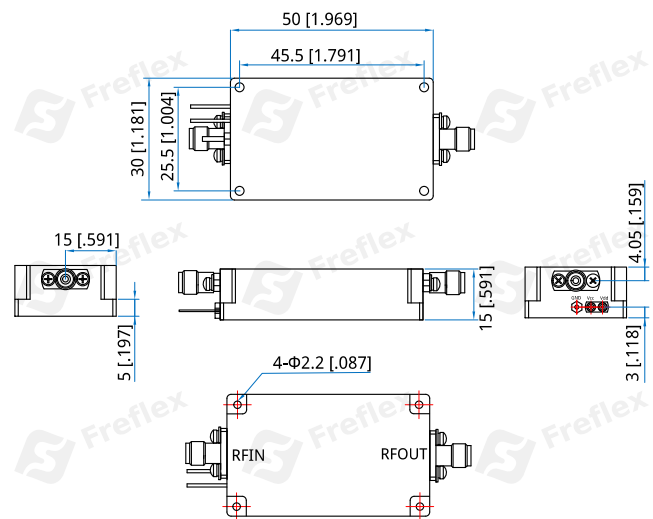

Unit: mm [in]
 Tolerance: ±0.2mm [±0.008in]

How To Order

FLA-200-6000-42-13

Customization is available upon request.