


FLA-600-4200-20-10

600~4200MHz, 20dB, 1dB

Features:
 * Small Size
 * Low Power Consumption

Applications:
 * Wireless
 * Transmitter
 * Laboratory Test



Electrical

Frequency:	600~4200MHz
Gain:	20dB typ.
Gain Flatness:	±2dB typ.
Noise Figure:	1dB typ.
Output Power (P1dB):	21dBm typ.
Input VSWR:	2 typ.
Output VSWR:	2 typ.
Voltage:	+5V DC
Impedance:	50Ω

Absolute Maximum Ratings*1

RF Input Power:	22dBm
Voltage:	+7V

[1] Permanent damage may occur if any of these limits are exceeded.

Mechanical

Size*2:	30*30*15mm 1.181*1.181*0.591in
RF Connectors:	SMA female
Power Supply Connectors:	Feed Through/Terminal Post
Mounting:	4-Φ2.2mm through-hole


[2] Exclude connectors.

Environmental


Operating Temperature:	-40~+85°C
Non-Operating Temperature:	-55~+125°C

Typical Performance Curves


Input VSWR vs. Frequency

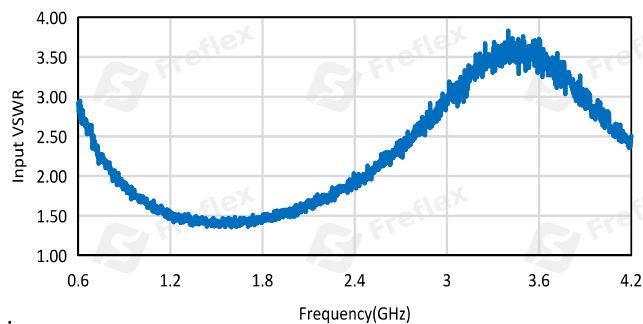

Output VSWR vs. Frequency

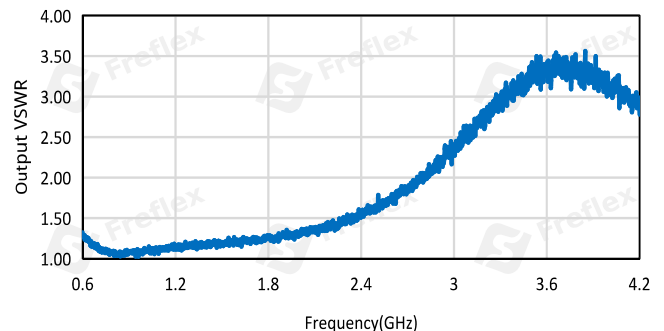

Outline Drawings

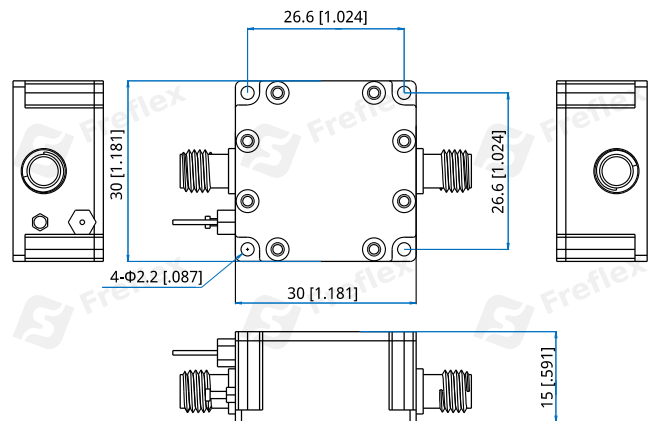

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]


How To Order

FLA-600-4200-20-10


Customization is available upon request.

Low Noise Amplifier

Gain vs. Frequency

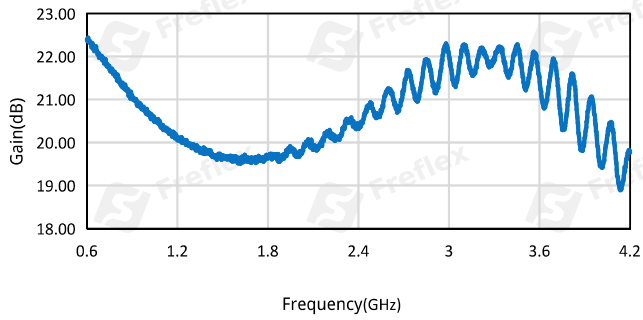

Noise Figure vs. Frequency

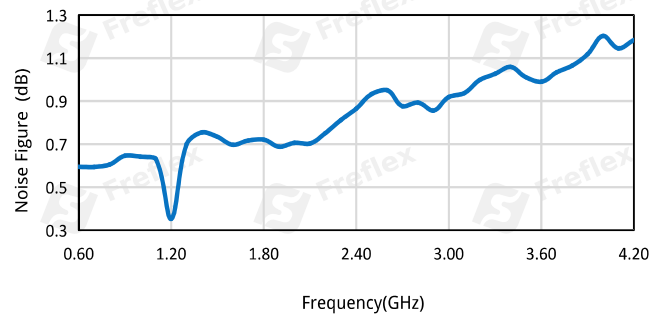

P1dB vs. Frequency

