


FLA-600-4200-30-08

600~4200MHz, 30dB, 0.8dB

Features:
 * Small Size
 * Low Power Consumption

Applications:
 * Wireless
 * Transmitter
 * Laboratory Test



Electrical

Frequency:	600~4200MHz
Gain:	30dB min.
Gain Flatness:	±2.5dB typ. @0.6~3GHz ±2.5dB typ. @3~4.2GHz
Noise Figure:	0.8dB typ.
Output Power (P1dB):	21dBm typ.
Input VSWR:	2.0 typ.
Output VSWR:	2.0 typ.
Voltage:	+5V DC
Impedance:	50Ω

Absolute Maximum Ratings

RF Input Power:	+22dBm
Voltage:	+7V

Mechanical


Size*1:	40*30*15mm 1.575*1.181*0.591in
RF Connectors:	SMA female
Power Supply Connectors:	Feed Through/Terminal Post

[1] Exclude connectors.


Environmental

Operating Temperature:	-40~+85°C
Non-operating Temperature:	-55~+150°C

Typical Performance Curves

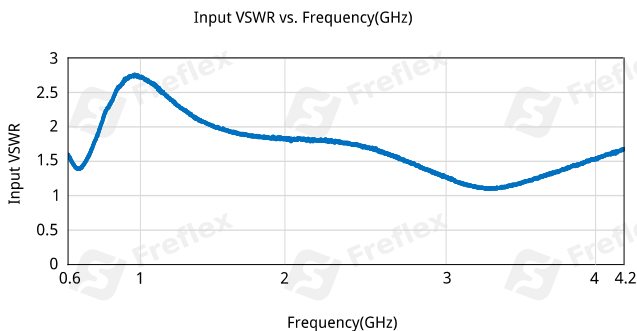

Outline Drawings

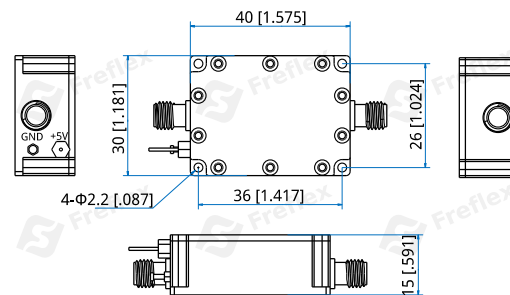

Unit: mm [in]
 Tolerance: ±0.2mm [±0.008in]

How To Order

FLA-600-4200-30-08

Customization is available upon request.

