


FLA-9K-3000-20-12

9kHz~3GHz, 20dB, 1.2dB

Features:
 * Broadband
 * Low Noise

Applications:
 * Wireless
 * Receiver
 * Laboratory Test
 * Radar



Description

This product series features ultra-wideband low-noise amplifiers (LNAs) operating from 9kHz to 3GHz. The lineup includes:

- LNA modules powered by 5-15V DC, where increasing supply voltage enhances gain and output power;
- LNA systems with integrated switching-mode power supplies (SMPS) accepting 85-265V AC input, recommended for most applications;
- LNA systems employing linear-regulated power supplies for 220V AC operation, delivering optimal performance where extreme power purity is critical.

Electrical

Frequency:	9kHz~3GHz
Gain:	20dB typ.
Gain Flatness:	±1.4dB typ.
Output Power (P1dB):	19dBm typ.
Output Power (Past):	20dBm typ.
Noise Figure:	1.2dB typ.
Spurious:	-60dBc max.
VSWR:	1.4 typ.
Reverse Isolation:	-25dB typ.
Voltage:	+5V DC (Outline A) +6~15V DC (Outline B) +85~+265V AC (Outline C) +220V AC (Outline D)
Current:	60mA typ. (Outline A, B)
Impedance:	50Ω

Absolute Maximum Ratings*1

RF Input Power:	+18dBm
Voltage:	+6V (Outline A) +20V (Outline B)

[1] Permanent damage may occur if any of these limits are exceeded.


Mechanical

RF Connectors: SMA Female (Removable)

Environmental

Operating Temperature:	-45~+85°C
Non-operating Temperature:	-55~+125°C

Outline Drawings

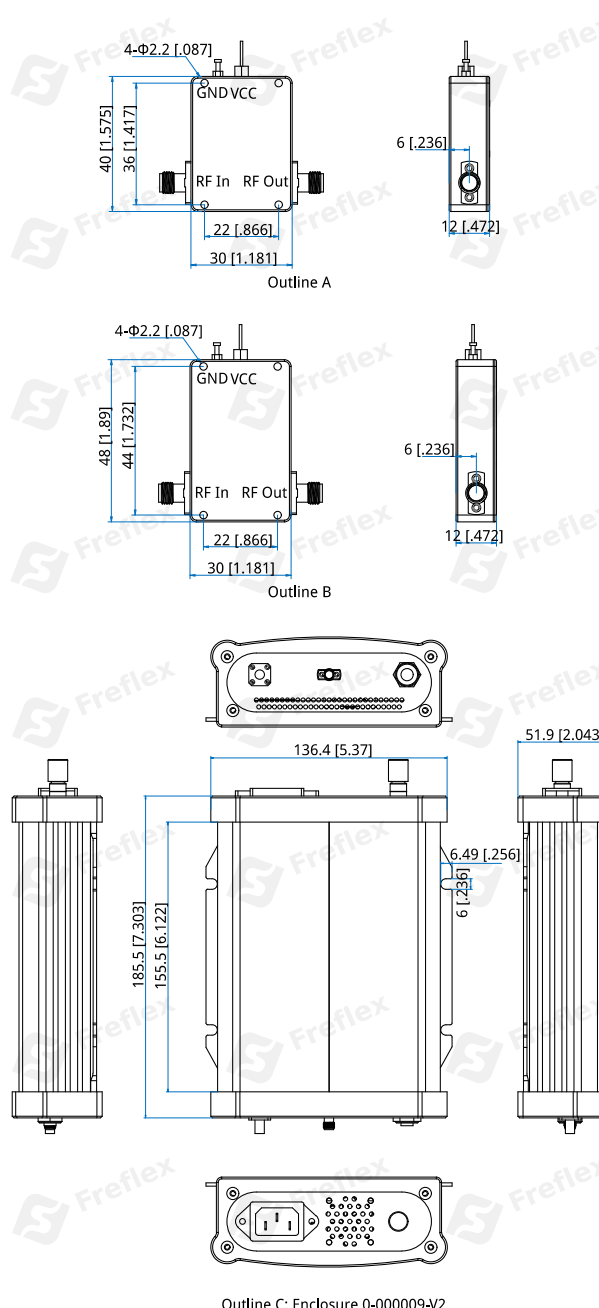

Outline C: Enclosure 0-000009-V2

How To Order

FLA-9K-3000-20-12 - Outline A


FLA-9K-3000-20-12-1 - Outline B

FLAS-9K-3000-20-12 - Outline C, AC-powered unit integrates a switching-mode power supply.

FLAS-9K-3000-20-12-1 - Outline D, AC-powered unit integrates a linear-regulated power supply.

Customization is available upon request.

Low Noise Amplifier

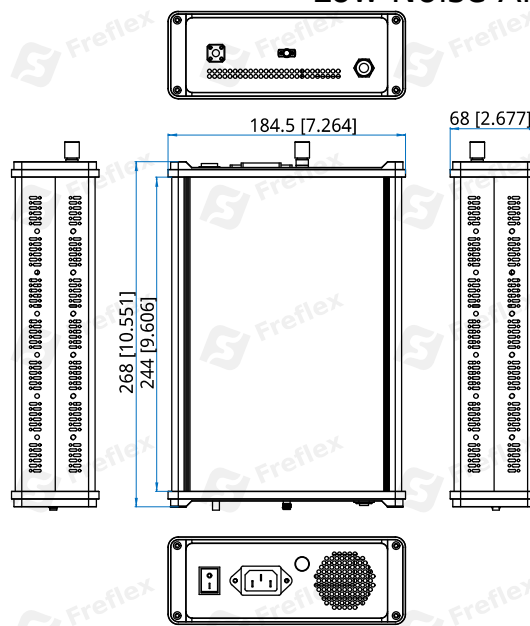

Outline D: Enclosure 0-000006

Unit: mm [in] Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]

Typical Performance Curves

