

FLF-1-40

DC~0.001GHz, 40dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	DC~0.001GHz
Stop Band Attenuation:	40dB@2~4MHz min. 50dB@4~100MHz min.
Insertion Loss:	1.5dB max.
VSWR:	1.5 max.

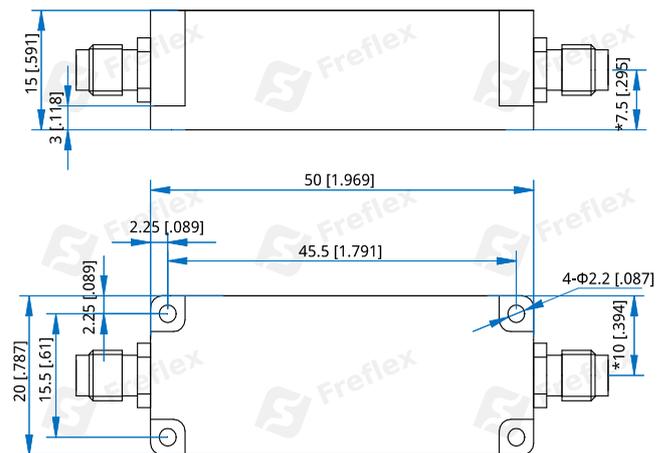
Mechanical

Size*1:	50*20*15mm 1.969*0.787*0.591in
RF Connectors:	SMA female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	-55~+85°C
--------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

*Ensure dimensions for design.

How To Order

FLF-1-40

Customization is available upon request.