

# FLF-10-50

## DC~0.01GHz, 50dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Frequency:	DC~0.01GHz
Stop Band Attenuation:	50dB@13-150MHz min.
Insertion Loss:	1dB max.
VSWR:	1.5 max.
Power:	1W max.
Impedance:	50Ω

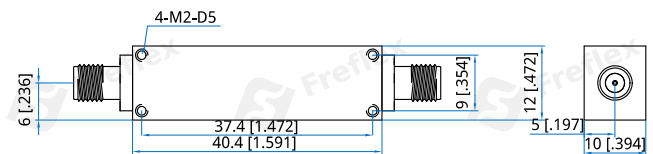
**Mechanical**

Size <sup>*1</sup> :	40.4*12*10mm
	1.591*0.472*0.394in
RF Connectors:	SMA female
Mounting:	4-M2, depth 5mm

[1] Exclude connectors.

**Environmental**

Operating Temperature:	-40~+70°C
------------------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

**How To Order**

**FLF-10-50**

Customization is available upon request.