

FLF-1000-30

DC~1GHz, 30dB

Features:
 * High Stopband Rejection
 * Small Size

Applications:
 * Telecom
 * Laboratory Test
 * Receivers
 * Instrumentation

Electrical

Frequency:	DC~1GHz
Insertion Loss:	0.9dB max.
VSWR:	1.2 typ.
Stop Band Attenuation:	30dB@1.9~5GHz typ.
Average Power:	10W max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	20*Φ11mm 0.787*Φ0.433in
RF Connectors:	SMA

[1] Exclude connectors.


Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Typical Performance Curves

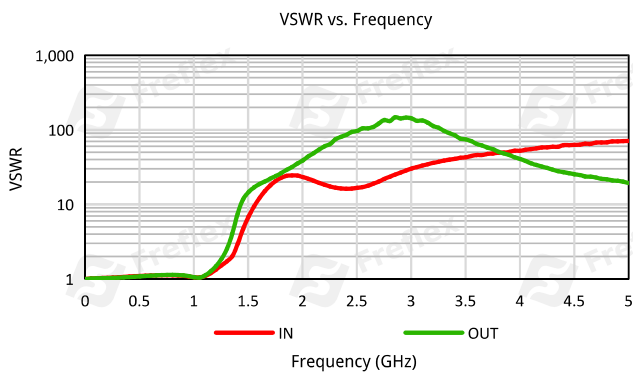

Outline Drawings

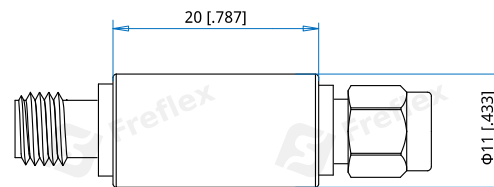

Unit: mm [in]
 Tolerance: ±0.2mm [±0.008in]

How To Order

FLF-1000-30

Customization is available upon request.

