

FLF-12000-70

DC~12GHz, 70dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	DC~12GHz
Insertion Loss:	1dB max.
VSWR:	1.7 max.
Stop Band Attenuation:	70dBc@14~19GHz min.
Average Power:	10W max.
Impedance:	50Ω

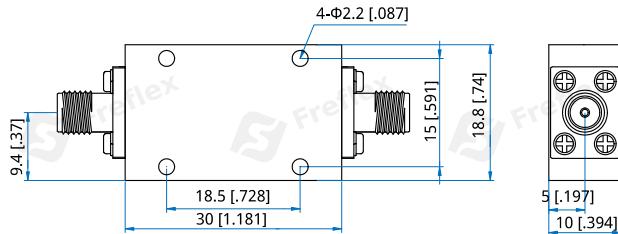
Mechanical

Size ^{*1} :	30*18.8*10mm
	1.181*0.74*0.394in
RF Connectors:	SMA female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature: -45~+85°C

Outline Drawings


Unit: mm [in]

Tolerance: ±0.508mm [±0.02in]

How To Order
FLF-12000-70

Customization is available upon request.