

FLF-13000-55

DC~13GHz, 55dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	DC~13GHz
Insertion Loss:	1.5dB max.
VSWR:	1.8 max.
Stop Band Attenuation:	55dB@15.2~40GHz min.
Average Power:	5W max.
Impedance:	50Ω

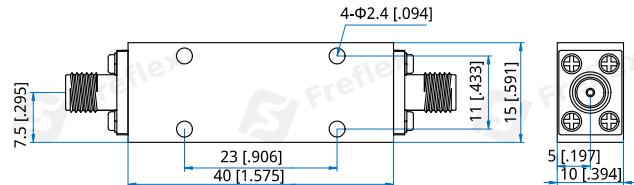
Mechanical

Size ^{*1} :	40*15*10mm
	1.575*0.591*0.394in
RF Connectors:	SMA female
Mounting:	4-Φ2.4mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature: -40~+75°C

Outline Drawings


Unit: mm [in]

Tolerance: ±0.254mm [±0.01in]

How To Order
FLF-13000-55

Customization is available upon request.