

## FLF-14000-45

DC~14GHz, 45dB

### Features:

- \* High Stopband Rejection
- \* Small Size

### Applications:

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

### Electrical

Frequency:	DC~14GHz
Stop Band Attenuation:	45dB@20~40GHz min.
Insertion Loss:	1dB max.
VSWR:	1.8 max.
Power:	5W max.
Impedance:	50Ω

### Mechanical


Size <sup>*1</sup> :	26*13*8mm 1.024*0.512*0.315in
Connectors:	Φ0.38 PIN
Mounting:	4-M2, depth 4mm
Finish:	Conductive oxidation
Weight:	8g

[1] Exclude connectors.

### Environmental

Operating Temperature:	-40~+75°C
------------------------	-----------

### Outline Drawings

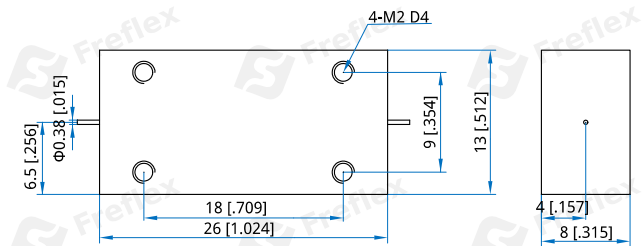

Unit: mm [in]

Tolerance: ±0.254mm [±0.01in]

### How To Order

**FLF-14000-45**

Customization is available upon request.