

# FLF-2-15-40

## 2~15MHz, 40dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Frequency:	2~15MHz
Average Power:	1W max. @17~200MHz min. 20W max.
Impedance:	50Ω

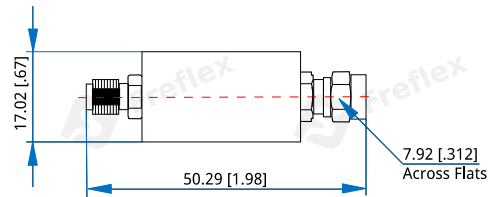
Stop Band Attenuation (dB min.)	Insertion Loss (dB max.)	VSWR (max.)	Frequency Range
40	2.5	1.5	@17~200MHz min.
40	2.0	1.5	@19.5~200MHz min.
40	1.0	1.4	@30~200MHz min.

**Mechanical**

Size:	50.29*Φ17.02mm 1.98*Φ0.67in
RF Connectors:	SMA Female SMA Male

**Environmental**

Operating Temperature:	-45~+75°C
------------------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.05mm [±0.002in]

**How To Order**
**FLF-2-15-40-1** - @17~200MHz min.

**FLF-2-15-40-2** - @19.5~200MHz min.

**FLF-2-15-40-3** - @30~200MHz min.

Customization is available upon request.