

## FLF-215-30

DC~0.215GHz, 30dB

### Features:

- \* High Stopband Rejection
- \* Small Size

### Applications:

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

### Electrical

Frequency<sup>\*1</sup>: DC~0.215GHz

Stopband Attenuation: 30dB min. @0.35~1GHz

Insertion Loss: 0.6dB max.

VSWR: 1.4 max.

Average Power: 100W CW max.

Impedance: 50Ω

[1] The actual design bandwidth will be greater than the Pass Band Frequency, and there is no bandwidth limit.

### Mechanical

Size<sup>\*2</sup>: 50\*25\*20mm

1.969\*0.984\*0.787in

RF Connectors: N female


Mounting: 4-M2.5mm through-hole

[2] Exclude connectors.

### Environmental

Temperature: -30~+70°C

### Outline Drawings

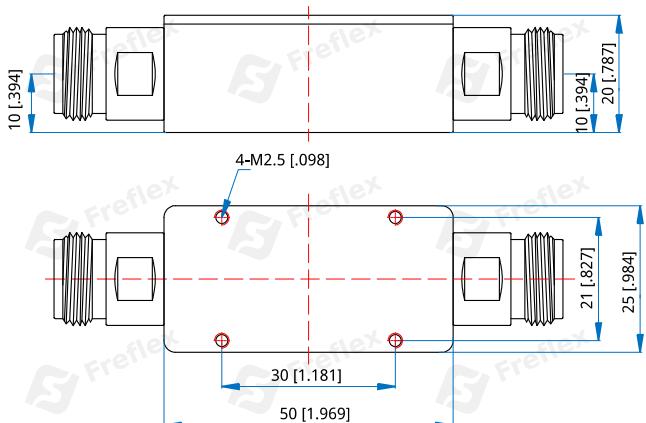

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

### How To Order

**FLF-215-30**

Customization is available upon request.