

# FLF-2200-30

## DC~2.2GHz, 30dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

|                        |                  |
|------------------------|------------------|
| Frequency:             | DC~2.2GHz        |
| Insertion Loss:        | 0.9dB max.       |
| VSWR:                  | 1.2 typ.         |
| Stop Band Attenuation: | 30dB@3~5GHz typ. |
| Average Power:         | 10W max.         |
| Impedance:             | 50Ω              |

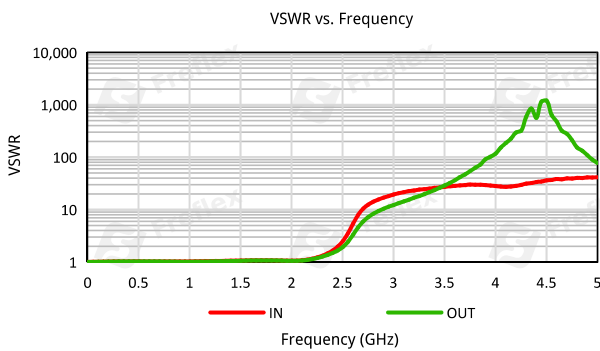
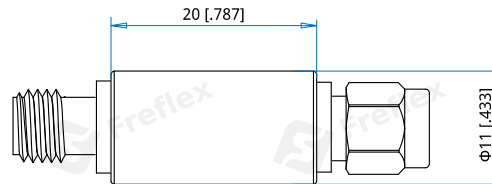
**Mechanical**

|                      |                            |
|----------------------|----------------------------|
| Size <sup>*1</sup> : | 20*Φ11mm<br>0.787*Φ0.433in |
| RF Connectors:       | SMA                        |

[1] Exclude connectors.

**Environmental**

|                            |           |
|----------------------------|-----------|
| Operating Temperature:     | -40~+70°C |
| Non-operating Temperature: | -55~+85°C |

**Typical Performance Curves**

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

**How To Order**

**FLF-2200-30**

Customization is available upon request.

