

FLF-25000-40-1

DC~25GHz, 40dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	DC~25GHz
Stop Band Attenuation:	40dB@28~40GHz min.
Insertion Loss:	1.5dB max.
VSWR:	1.7 max.
Input Power:	1W max.
Impedance:	50Ω

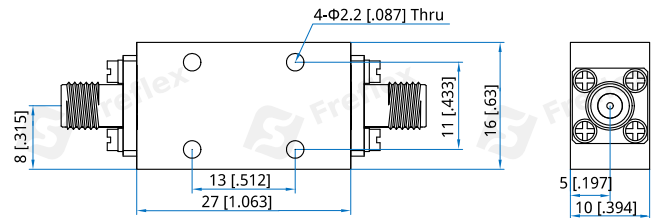
Mechanical

Size ^{*1} :	27*16*10mm 1.063*0.63*0.394in
RF Connectors:	2.92mm Female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-45~+85°C
------------------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FLF-25000-40-1

Customization is available upon request.