

FLF-30-40

DC~0.03GHz, 40dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	DC~0.03GHz
Stop Band Attenuation:	40dB@45MHz min. 60dB@60MHz min.
Insertion Loss:	1dB max.
VSWR:	1.5 max.
Power:	5W min.

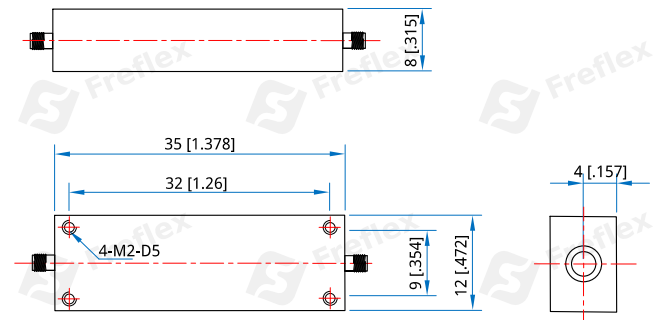
Mechanical

Size ^{*1} :	35*12*8mm 1.378*0.472*0.315in
RF Connectors:	SMA female
Mounting:	4-M2, depth 5mm

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings


Unit: mm [in]

Tolerance: ± 0.2 mm [± 0.008 in]

How To Order

FLF-30-40

Customization is available upon request.