

FLF-300-60

DC~0.3GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	DC~0.3GHz
Insertion Loss:	0.5dB max.
VSWR:	1.5 max.
Stop Band Attenuation:	60dB@0.643~3GHz min.
Average Power:	1W Max.
Impedance:	50Ω

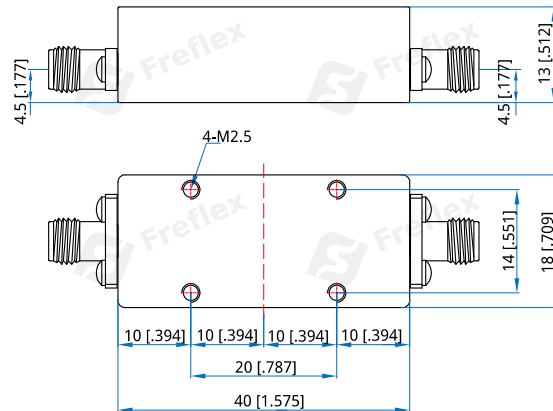
Mechanical

Size ^{*1} :	40*18*13mm 1.575*0.709*0.512in
RF Connectors:	SMA Female
Mounting:	4-M2.5 through-hole

[1] Exclude connectors

Environmental

Operating Temperature:	-30~+70°C
------------------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FLF-300-60

Customization is available upon request.