

FLF-3000-30

DC~3GHz, 30dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	DC~3GHz
Insertion Loss:	0.9dB max.
VSWR:	1.3 typ.
Stop Band Attenuation:	30dB@4.78~7.5GHz typ.
Average Power:	10W max.
Impedance:	50Ω

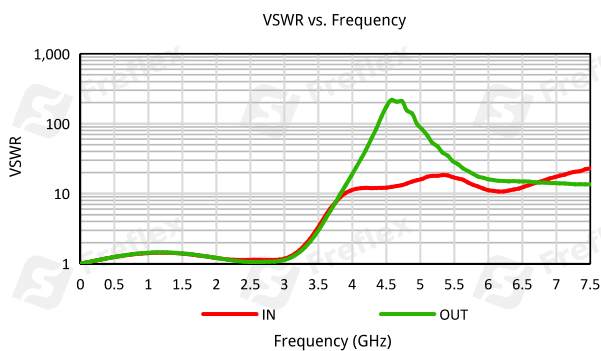
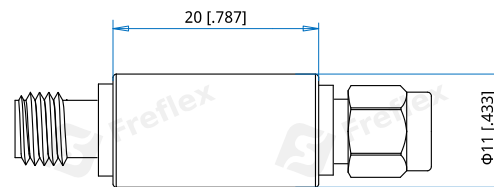
Mechanical

Size ^{*1} :	20*φ11mm 0.787*φ0.433in
RF Connectors:	SMA

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Typical Performance Curves

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FLF-3000-30

Customization is available upon request.

