

## FLF-3000-60

DC~3GHz, 60dB

### Features:

- \* High Stopband Rejection
- \* Small Size

### Applications:

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

### Electrical

Frequency:	DC~3GHz
Stopband Attenuation:	60dB min. @3.52~10GHz
Insertion Loss:	1dB max. @DC~2.9GHz
	1.5dB max. @2.9~3GHz
VSWR:	1.3 max.
Average Power:	15W max.
Impedance:	50Ω

### Mechanical


Size <sup>*1</sup> :	44*24*10mm
	1.732*0.945*0.394in
RF Connectors:	SMA female
Mounting:	4-Φ2.2mm through-hole
Weight:	33g

[1] Exclude connectors.

### Environmental

Temperature: -55~+85°C

### Outline Drawings

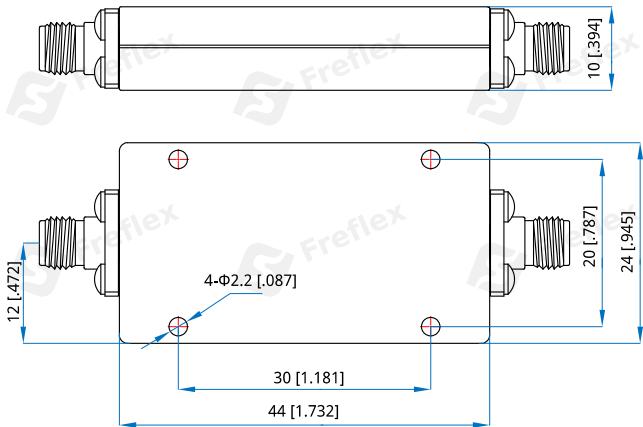

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

### How To Order

**FLF-3000-60**

Customization is available upon request.